


# ABSORBER SERIES EHP

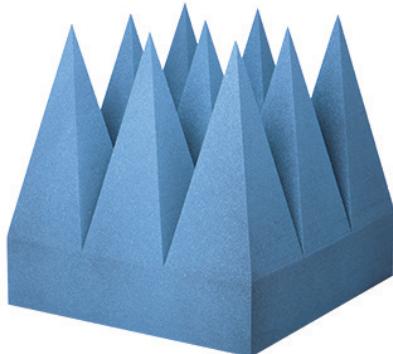

## SERIES EHP

- **Non-Hygroscopic Substrate**
- **Broadband Performance**
- **1.0 W/in<sup>2</sup> Power Handling Capability**
- **Reflectivity Performance Testing**
- **Fire Retardant**
- **FlexSorb™ Available**

**ETS-Lindgren's EHP Series Extra High Performance Microwave Pyramidal Absorber** is designed for use over a wide frequency spectrum and has been used as an effective tool for the reduction of reflections from 30 MHz through 100 GHz. Each piece of absorber is fabricated of the highest quality urethane foam, which is cut into a precise bun configuration and impregnated with a conductive carbon using a proprietary formulation. Generally, pyramidal absorber is preferred for specular treatment on chamber back walls, side walls, floors, and ceilings. Applications include military, automotive, and wireless measurement.

### Features

#### Non-Hygroscopic Substrate

ETS-Lindgren absorbers use a new fire-retardant chemical formula that is non-hygroscopic. As a result, the absorber is not affected by moisture and will maintain its mechanical and RF performance over the life of the product.

#### Broadband Performance

EHP Series absorber is designed to provide excellent RF attenuation over its usable frequency range.

#### Power Handling Capability

EHP Series absorber can safely perform in environments with operating temperatures up to 90° C (190° F) with a power density capability of 1.0 W/in<sup>2</sup>.

#### Tested Performance

EHP Series absorber is tested for reflectivity performance using the Naval Research Lab (NRL) broadband swept frequency arch method.

#### Fire Retardancy

EHP Series absorber meets applicable US government and commercial flammability specifications as verified by an independent testing laboratory.

#### Optional FlexSorb™ Treatment

With FlexSorb, you can enjoy the same excellent performance characteristics as our traditional absorbers, with the advantages of improved durability. FlexSorb is a special absorber treatment that allows an absorber to bend but not break. It's ideal for high traffic areas like chamber doorways and interior walls, or for tests that require an anechoic floor treatment. Since FlexSorb is also non-hygroscopic, its weight does not change in the presence of atmospheric moisture.

# ABSORBER SERIES EHP

## Physical Specifications

Model	Absorber Footprint	Pyramids Per Absorber	Base Height
EHP-03PCL	24 in x 24 in	256	1.9 cm (0.75 in)
EHP-05PCL	24 in x 24 in	114	2.5 cm (0.98 in)
EHP-08PCL	24 in x 24 in	64	5.1 cm (2.01 in)
EHP-12PCL	24 in x 24 in	36	5.7 cm (2.24 in)
EHP-18PCL	24 in x 24 in	16	5.7 cm (2.24 in)
EHP-24PCL	24 in x 24 in	9	10.2 cm (4.02 in)
EHP-36PCL	24 in x 24 in	4	15.2 cm (5.98 in)
EHP-48PCL	24 in x 24 in	4	20.3 cm (7.99 in)
EHP-72PCL	24 in x 24 in	1	30.5 cm (12.01 in)

## Physical Specifications

Model	Overall Height	Pyramid Height	Weight
EHP-03PCL	8.25 cm (3.25 in)	6.4 cm (2.52 in)	1 kg (2.20 lb)
EHP-05PCL	12.7 cm (5.00 in)	10.2 cm (4.00 in)	1.6 kg (3.53 lb)
EHP-08PCL	21.6 cm (8.50 in)	16.5 cm (6.50 in)	2.8 kg (6.17 lb)
EHP-12PCL	31.1 cm (12.24 in)	25.4 cm (10.00 in)	4.6 kg (10.14 lb)
EHP-18PCL	46.4 cm (18.27 in)	40.6 cm (15.98 in)	4.6 kg (10.14 lb)
EHP-24PCL	61.0 cm (24.02 in)	50.8 cm (20.00 in)	6.1 kg (13.45 lb)
EHP-36PCL	91.4 cm (35.98 in)	76.2 cm (30.00 in)	9.5 kg (20.94 lb)
EHP-48PCL	121.9 cm (47.99 in)	101.6 cm (40.00 in)	11.3 kg (24.91 lb)
EHP-72PCL	182.9 cm (72.01 in)	152.4 cm (60.00 in)	15.9 kg (35.05 lb)

## Physical Specifications

Adhesive	Yes
Clip	Yes
Color	Rantec Blue
Environmental	Temperature: 12°C to 32°C (50°F to 90°F) Relative Humidity: 50% ± 20%
Max. Absorber Temperature	90°C (190°F)
Ratings, Fire Retardant	NRL 8093, Tests 1,2,3, TI #2693066, MIT MS-8-21, UL 94 & DIN 4102-B2
Velcro	45.72 cm (18 in)

# ABSORBER SERIES EHP

## Technical Specifications

### Electrical Specifications

Model	Frequency Minimum	Frequency Maximum
<b>EHP-03PCL</b>	4 GHz	40 GHz
<b>EHP-05PCL</b>	2 GHz	40 GHz
<b>EHP-08PCL</b>	1 GHz	40 GHz
<b>EHP-12PCL</b>	1 GHz	40 GHz
<b>EHP-18PCL</b>	500 MHz	40 GHz
<b>EHP-24PCL</b>	200 MHz	40 GHz
<b>EHP-36PCL</b>	80 MHz	40 GHz
<b>EHP-48PCL</b>	80 MHz	40 GHz
<b>EHP-72PCL</b>	80 MHz	40 GHz

**Maximum Power Density:** 1.55 kW/m<sup>2</sup>, 155 mW/cm<sup>2</sup>, 1.0 W/in<sup>2</sup> (Dependant upon frequency and duration).

### Max Reflections

Model	80 MHz	120 MHz	200 MHz	300 MHz	500 MHz	1–2 GHz	2–4 GHz	4–8 GHz	8–12 GHz	12–18 GHz	18–40 GHz
<b>EHP-03PCL</b>								-30 dB	-40 dB	-45 dB	-45 dB
<b>EHP-05PCL</b>							-30 dB	-40 dB	-45 dB	-50 dB	-50 dB
<b>EHP-08PCL</b>						-30 dB	-40 dB	-45 dB	-50 dB	-50 dB	-50 dB
<b>EHP-12PCL</b>						-35 dB	-40 dB	-45 dB	-50 dB	-50 dB	-50 dB
<b>EHP-18PCL</b>					-30 dB	-40 dB	-45 dB	-50 dB	-50 dB	-50 dB	-50 dB
<b>EHP-24PCL</b>		-20 dB	-30 dB	-35 dB	-40 dB	-45 dB	-50 dB	-50 dB	-50 dB	-50 dB	-50 dB
<b>EHP-36PCL</b>	-11 dB	-13 dB	-25 dB	-30 dB	-40 dB	-45 dB	-50 dB	-50 dB	-50 dB	-50 dB	-50 dB
<b>EHP-48PCL</b>	-15 dB	-20 dB	-30 dB	-35 dB	-40 dB	-45 dB	-50 dB	-50 dB	-50 dB	-50 dB	-50 dB
<b>EHP-72PCL</b>	-20 dB	-25 dB	-30 dB	-37.5 dB	-45 dB	-50 dB	-50 dB	-50 dB	-50 dB	-50 dB	-50 dB