

RF POWER AMPLIFIERS MODEL 8000-032



ETS-Lindgren's Model 8000-032 RF Power Amplifier is a 120W power amplifier, designed primarily for EMC applications that include IEC/EN 61000-4-6 requirements. Utilizing GaAs technology, this RF amplifier provides higher linearity, rugged design and better efficiency performance versus silicon-based amplifiers.

The 8000-032 provides very low distortion and tolerance for 100% mismatch.

MODEL 8000-032

- **IEC/EN 61000-4-6**
- **High Reliability GaAs Design**
- **Excellent Performance and Efficiency**
- **Safety Interlock**

Technical Specifications

Electrical

Frequency Range	10 kHz to 250 MHz
Nominal Output Power	120W
Gain Variation	± 2 dB
Harmonics	-20 dBc Maximum
Output Impedance	50 Ω
Input VSWR	2:1 Maximum
AC Supply	100 to 250 VAC, Single Phase
Supply Frequency Range	50/60 Hz
Line Power	< 1 kVA

Mechanical


Remote Interface	GPIB
RF Connectors	Type N (f)

Physical

Dimensions	19 in, 4U Case, 500 mm (19.7 in) Deep
Weight	18.0 kg (39.7 lb)
Case Style (Standard)	Rack Mount with Rear Panel Connectors
Case Style (Optional)	Bench Mount, Front Panel Connectors

8000-032 Output Power (1dB)

ETS-LINDGREN
An ESCO Technologies Company

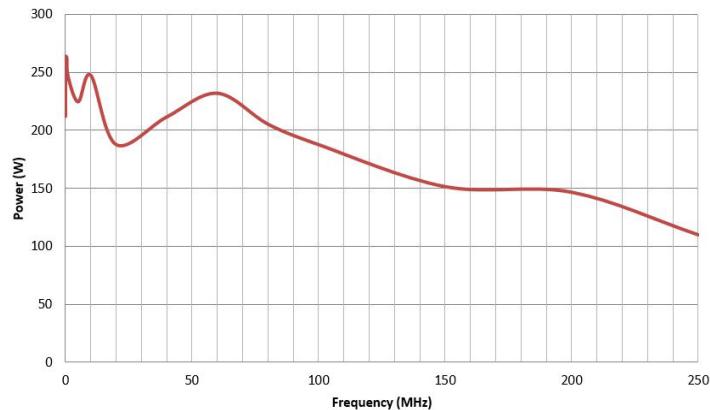

ETS-LINDGREN
An ESCO Technologies Company
ets-lindgren.com