

RF POWER AMPLIFIERS MODEL 8000-035



ETS-Lindgren's Model 8000-035 RF Power Amplifier is a 35W power amplifier, designed primarily for EMC applications that include IEC/EN 61000-4-3. Utilizing GaAs technology, this RF amplifier provides higher linearity, rugged design and better efficiency performance versus silicon-based amplifiers.

The 8000-035 provides very low distortion and tolerance for 100% mismatch.

MODEL 8000-035

- **IEC 61000-4-3, 30 V/m**
- **High Reliability GaAs Design**
- **Excellent Performance and Efficiency**
- **Safety Interlock**

Technical Specifications

Electrical


Frequency Range	1 MHz to 1 GHz
Nominal Output Power	35W
Gain Variation	± 3 dB
Harmonics	- 20 dBc Maximum
Output Impedance	50 Ω
Input VSWR	2:1 Maximum
AC Supply	100 to 250 VAC, Single Phase
Supply Frequency Range	50/60 Hz
Line Power	300 VA

Mechanical

Remote Interface	GPIB
RF Connectors	Type N (f)

Physical

Dimensions	19 in, 3U Case, 550 mm (21.7 in) Deep
Weight	13.0 kg (28.7 lb)
Case Style (Standard)	Rack Mount with Rear Panel Connectors
Case Style (Optional)	Bench Mount, Front Panel Connectors

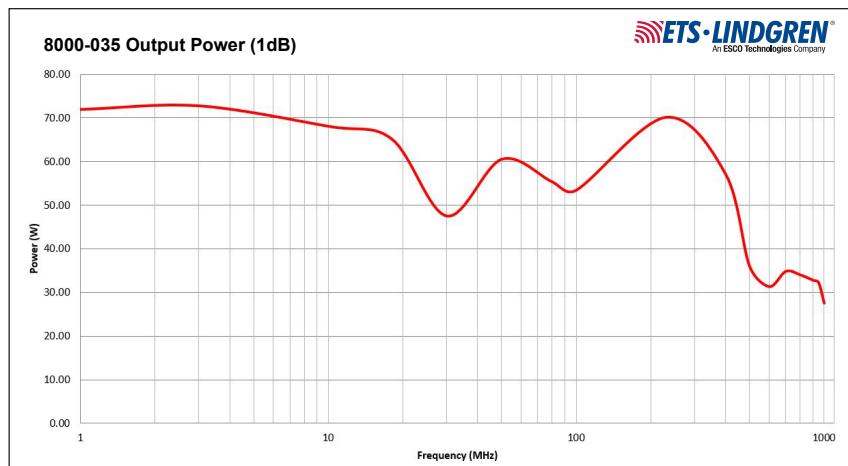

ETS-LINDGREN
An ESCO Technologies Company
ets-lindgren.com